

LUCCA 30 STEPLIGHT WIDE BRASS 2024  
SLL3TW042

LUMINAIRE REF:



PROJECT REF:



BRASS

The new Lucca 30 is an energy efficient LED miniature steplight incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It is ideal for creating stunning skimming light across steps. It comes with narrow, medium or wide beams to suit your projects. This product can also be used as a downlight.

It is IP67 rated so ideal for use both inside and out. Fittings come with 1m of cable as standard. Custom cable lengths are available upon request. If using inside, the warranty increases to 5 years.



WIDE

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




LUCCA 30 STEPLIGHT WIDE BRASS 2024

SLL3TW042

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION             | 350mA | 500mA | 700mA |
|---------------------------|-------|-------|-------|
| BEAM ANGLE (°)            | 36°   | 36°   | 36°   |
| LED SOURCE LUMENS (LM)    | 101   | 137   | 181   |
| LUMINAIRE LUMENS (LM)     | 62    | 84    | 111   |
| LUMINAIRE EFFICACY (LM/W) | 62    | 56    | 53    |
| INTENSITY RATING (CD)     | 154   | 212   | 282   |
| POWER CONSUMPTION (W)     | 1     | 1.5   | 2.1   |
| DRIVE CURRENT (mA)        | 350   | 500   | 700   |
| FORWARD VOLTAGE (V DC)    | 3     | 3     | 3     |
| MAX TEMPERATURE (°C)      | 40    | 40    | 35    |
|                           |       |       |       |
|                           |       |       |       |


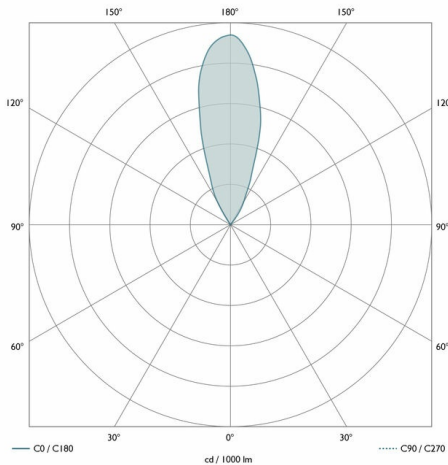


|                |                                                                                                                                 |
|----------------|---------------------------------------------------------------------------------------------------------------------------------|
| TM66           | 2.4 (LIA Assured Verification Score)                                                                                            |
| INGRESS RATING | IP65 + IP67                                                                                                                     |
| IMPACT RATING  | IK08                                                                                                                            |
| COMPLIANCE     | BS EN 60598-2-13: 2006+A1: 2012+A2: 2016<br>BS EN IEC 60598-1:2021<br>BS EN 62493:2015+A1:2022<br>BS EN IEC 62031:2020+A11:2021 |

|                                |                     |
|--------------------------------|---------------------|
| COLOUR TEMPERATURE             | 2700K               |
| CIE CRI AVAILABLE AS           | 98 Ra               |
| IES TM-30 COLOUR FIDELITY (Rf) | 93.8                |
| IES TM-30 COLOUR GAMUT (Rg)    | 98.1                |
| BINNING                        | 2 SDCM (Equivalent) |
| LIFETIME L70/B10 (HOURS)       | >50000              |
| AMBIENT TEMPERATURE (Ta)       | N/A                 |

|                  |                                                                                   |
|------------------|-----------------------------------------------------------------------------------|
| ELECTRICAL       |                                                                                   |
| SOURCE TYPE      | LED                                                                               |
| PRODUCT CLASS    | Class III (SELV low voltage)                                                      |
| DIMMING PROTOCOL | 1-10V dimmable<br>DALI dimmable<br>Mains dimmable (phase cut dimming)<br>Switched |

|                |                                 |
|----------------|---------------------------------|
| OTHER DATA     |                                 |
| CABLE TYPE     | 2 Core Silicone (180°C)         |
| CABLE SIZE     | 6mm OD - 2 off 24/0.2 (0.75mm2) |
| CABLE LENGTH   | 1000mm                          |
| CONNECTOR TYPE | N/A                             |
| WEIGHT         | N/A                             |
| FIRE RATED     | N/A                             |

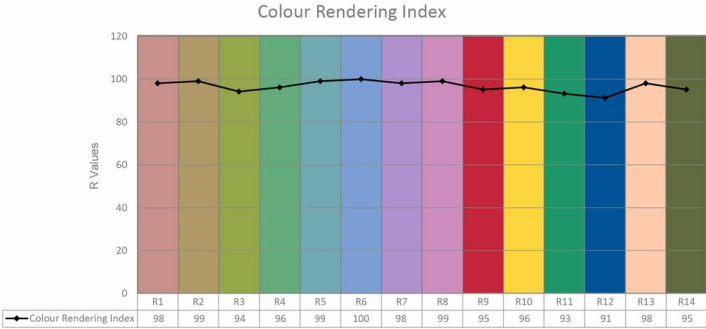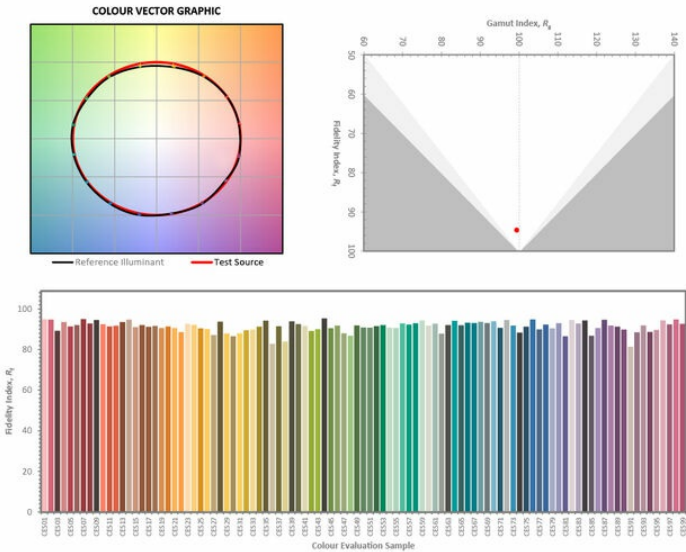

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81