

LUCCA 40 WIDE BRONZE WITH COWL 2024 ULL4TWG062


LUMINAIRE REF:

PROJECT REF:



The new Lucca 40 is an energy efficient LED midi uplight with a glare cowl incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It is ideal for creating stunning uplighting effects to columns, arches, window reveals and along walls. It comes with narrow, medium or wide beams to suit your projects. It is IP67 rated so ideal for use both inside and out. Fittings come with 1m of cable as standard. Custom cable lengths are available upon request. If using inside, the warranty increases to 5 years.

BRONZE ANODISED





WIDE

ACCESSORIES

ACENIPSML



IP66 ENCLOSURE FOR DRIVER LARGE ACENIPLRG



ACL4TRS2

3 WARRANTY

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM

BRITISH

UK CA

 \cap

JOHN CLILLEN

700mA

399

181

108

51

236

2.1

700

3

4C

Cable Type

Cable Size Cable Length

Connector Typ

Weight

Fire rated

LUCCA 40 WIDE BRONZE WITH COWL 2024 ULL4TWG062

350mA

39°

101

60

60

131

350

40

500mA

39°

137

82

55

179


1.5

500

40

LUMINAIRE REF:

PROJECT REF:



COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.8
IES TM-30 COLOUR GAMUT (Rg)	97.9
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	N/A
OTHER DATA	
	2 Core Silicone (180°C)
	6mm OD - 2 off 24/0.2 (0.75mm2)
	1000mm
e	N/A

N/A N/A

TM66	2.4 (LIA Assured Verification Score)
INGRESS RATING	IP65 + IP67
IMPACT RATING	IK08
COMPLIANCE	BS EN 60598-2-13: 2006+A1: 2012+A2: 2016
	BS EN IEC 60598-1:2021
	BS EN 62493:2015+A1:2022
	BS EN IEC 62031:2020+A11:2021

ELECTRICAL

SOURCE TYPE PRODUCT CLASS DIMMING PROTOCOL

SPECIFICATION

BEAM ANGLE (°)

LED SOURCE LUMENS (LM)

LUMINAIRE LUMENS (LM)

INTENSITY RATING (CD)

DRIVE CURRENT (mA)


LUMINAIRE EFFICACY (LM/W)

POWER CONSUMPTION (W)

FORWARD VOLTAGE (V DC)

MAX TEMPERATURE (°C

LED	
Class III (SELV low voltage)	
DALI dimmable	
1-10V dimmable	
Mains dimmable (phase cut dimming)	
C. Nulley I	

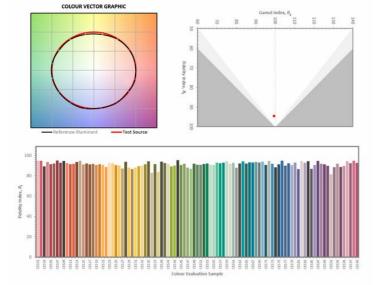



Colour Rendering Index 120 80 R Values 60
 R2
 R3
 R4
 R5
 R6
 R7

 99
 94
 96
 99
 100
 98
98 99 93 95



WWW.JOHNCULLENLIGHTING.COM UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



UK CA

C

BRITISH