

LUCCA 40 ASYMMETRIC BLACK 2024 ULL4TA022


LUMINAIRE REF:

PROJECT REF:



The new Lucca 40 is an energy efficient LED midi uplight incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It is ideal for creating stunning uplighting effects to columns, arches, window reveals and along walls. It is IP67 rated so ideal for use both inside and out. Fittings come with 1m of cable as standard. Custom cable lengths are available upon request. If using inside, the warranty increases to 5 years.

BLACK ANODISED





ASYMMETRIC

ACCESSORIES

IP66 ENCLOSURE

FOR DRIVER

SMALL

ACENIPSML



IP66 ENCLOSURE FOR DRIVER LARGE ACENIPLRG



LUCCA 40 TRIM BURIAL SLEEVE ACL4TRS2



UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM



LUCCA 40 ASYMMETRIC BLACK 2024 ULL4TA022

LUMINAIRE REF:

PROJECT REF:

	SPECIFICATION	350mA	500mA	700mA
	BEAM ANGLE (°)	Asymmetric	Asymmetric	Asymmetric
LE	ED SOURCE LUMENS (LM)	101	137	181
	LUMINAIRE LUMENS (LM)	32	44	59
LUM	INAIRE EFFICACY (LM/W)	32	29	28
	INTENSITY RATING (CD)	138	205	271
PO	WER CONSUMPTION (W)	1	1.5	2.1
	DRIVE CURRENT (mA)	350	500	700
FC	RWARD VOLTAGE (V DC)	3	3	3
	MAX TEMPERATURE (°C)	40	40	40

TM66 2.4 (LIA Assured Verification Score) INGRESS RATING IP65 + IP67 IMPACT RATING COMPLIANCE

IK08 BS EN 60598-2-13: 2006+A1: 2012+A2: 2016 BS EN IEC 60598-1:2021 BS EN 62493:2015+A1:2022 BS EN IEC 62031:2020+A11:2021

ELECTRICAL SOURCE TYPE LED

PRODUCT CLASS Class III (SELV low voltage) DIMMING PROTOCOL DALI/Phase cut/1-10V/Dimmable1-10V dimmable

COLOUR TEMPERATURE 2	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf) 9	94.5
IES TM-30 COLOUR GAMUT (Rg)	97.6
BINNING 2	2 SDCN
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	N/A

Cable Type


Cable Size

Cable Length

Connector Type Weight Fire rated

)	94.5
)	97.6
ò	2 SDCM (Equivalent)
)	>50000
)	N/A
4	
	2 Core Silicone (180°C)

OTHER DATA	
	2 Core Silicone (180°C)
	6mm OD - 2 off 24/0.2 (0.75mm2)
	1000mm
	N/A
	N/A
	N/A

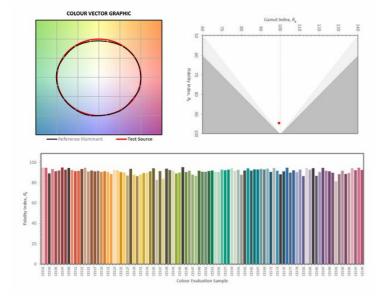







UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

 \odot John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to $\pm 5\%$ tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM

BRITISH DESIGN

UK CA

 \cap