

LUMINAIRE REF:


PROJECT REF:



The new Lucca 40 is a trimless energy efficient LED midi uplight incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It is ideal for creating stunning uplighting effects to columns, arches, window reveals and along walls. It comes with narrow, medium, wide. elliptical and asymmetric beams to suit your projects.

It is IP67 rated so ideal for use both inside and out. Fittings come with a burial sleeve and 1m of cable as standard. Custom cable lengths are available upon request. If using inside, the warranty increases to 5 years.

BLACK ANODISED





WIDE

ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE ACENIPLRG IP66 ENCLOSURE FOR DRIVER SMALL

ACENIPSML



UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM

BRITISH DESIGN UK CA

 \cap

JOHN CI II I EN

700mA

399

181

108

51

236

2.1

700

3

4C

LUCCA 40 TRIMLESS WIDE BLACK 2024 ULL4FW022

350mA

39°

101

60

60

131

350

40

SPECIFICATION

BEAM ANGLE (°)

LED SOURCE LUMENS (LM)

LUMINAIRE LUMENS (LM)

INTENSITY RATING (CD)

DRIVE CURRENT (mA)

LUMINAIRE EFFICACY (LM/W)


POWER CONSUMPTION (W)

FORWARD VOLTAGE (V DC)

MAX TEMPERATURE (°C

LUMINAIRE REF:

PROJECT REF:

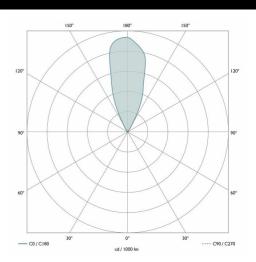

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.8
IES TM-30 COLOUR GAMUT (Rg)	97.9
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	N/A
OTHER DATA	
CABLE TYPE	2 Core Silicone (180°C)
CABLE SIZE	6mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	1000mm
CONNECTOR TYPE	N/A

66	2.4 (LIA Assured Verification Score)
١G	IP65 + IP67
١G	IK08
CE	BS EN 60598-2-13: 2006+A1: 2012+A2: 2016
	BS EN IEC 60598-1:2021
	BS EN 62493:2015+A1:2022
	BS EN IEC 62031:2020+A11:2021

500mA

39°

137

82

55

179

1.5

500

40

ELECTRICAL


ТМ

INGRESS RATIN

IMPACT RATIN

COMPLIAN

SOURCE TYPE LED PRODUCT CLASS Class III (SELV low voltage) DIMMING PROTOCOL DALI/Phase cut/1-10V/Dimmable1-10V dimmable

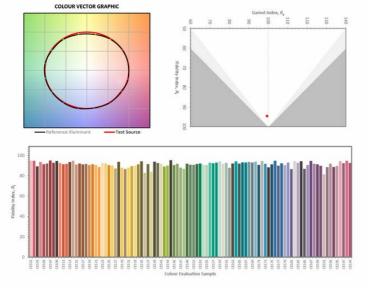



WEIGHT N/A FIRE RATED N/A





UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM

BRITISH

UK CA

 \cap