

LUCCA 40 STEPLIGHT 2024  
VERSATILE STEPLIGHT FOR USE IN NICHES AND FLOORING

LUMINAIRE REF:

PROJECT REF:



The new Lucca 40 is a trimless energy efficient LED midi steplight incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It comes with an asymmetric beam to skim light across steps. It is IP67 rated so ideal for use both inside and out. Fittings come with 1m of cable as standard. Custom cable lengths are available upon request.



WHITE RAL 9910



BLACK ANODISED





BRASS



BRONZE ANODISED



STAINLESS STEEL



ASYMMETRIC

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML




LUCCA 40 STEPLIGHT 2024

VERSATILE STEPLIGHT FOR USE IN NICHES AND FLOORING

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	ASYMMETRIC
BEAM ANGLE (°)	Asymmetric
LED SOURCE LUMENS (LM)	181
LUMINAIRE LUMENS (LM)	59
INTENSITY RATING (CD)	271
POWER CONSUMPTION (W)	2.1
LUMINAIRE EFFICACY (LM/W)	28
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	3

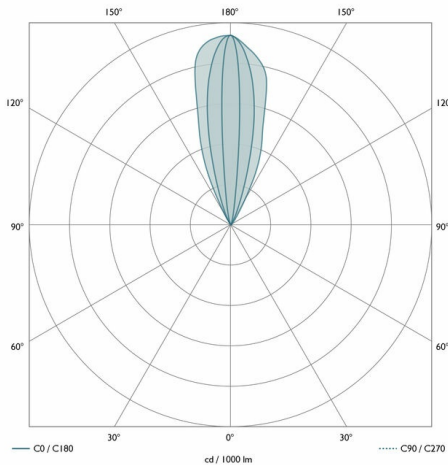

TM66	2.4 (LIA Assured Verification Score)
INGRESS RATING	IP65 + IP67
IMPACT RATING	IK08
COMPLIANCE	BS EN 60598-2-13: 2006+A1: 2012+A2: 2016 BS EN IEC 60598-1:2021 BS EN 62493:2015+A1:2022 BS EN IEC 62031:2020+A11:2021

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	N/A
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	N/A
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	Check individual power ratings

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable DALI dimmable Mains dimmable (phase cut dimming) Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180°C)
CABLE SIZE	6mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	1000mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

