

KEW 25 SURFACE

GLK2WW023


LUMINAIRE REF:

PROJECT REF:



BLACK RAL 9005

The Kew 25 Surface is a miniature surface mounted IP66 spotlight, ideal for pinpointing landscape ornaments from above or wall grazing for use both inside and out. Our unique, patented wall mounting system allows for quick, toolfree installation on site. The luminaire mounts onto the wall bracket and is self-locking at 15° intervals, preventing $the \ need \ for \ further \ fixing. \ A \ discreet, optional \ tamper \ proofing \ feature \ is \ available \ if \ required \ for \ commercial$ projects. The Kew Surface is IP66 Rated - see FAQs for more details on IP Values.





ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE **ACENIPLRG**



IP66 ENCLOSURE FOR DRIVER SMALL **ACENIPSML**



KFW/HAMPTON 40 CONDUIT BOX ACHK4CB1



KFW 25 CAP SNOOT BLACK ACK2CS021



KFW 25 FULL SNOOT BLACK ACK2FS021



KFW 25 HALF SNOOT BLACK ACK2HS021



KEW 25 SHORT SNOOT BLACK ACK2SS021




WWW.JOHNCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81









KEW 25 SURFACE

GLK2WW023

LUMINAIRE REF:

PROJECT REF:


SPECIFICATION	350mA	500mA
BEAM ANGLE (°)	30°	30°
LED SOURCE LUMENS (LM)	101	137
LUMINAIRE LUMENS (LM)	60	85
LUMINAIRE EFFICACY (LM/W)	60	57
INTENSITY RATING (CD)	189	263
POWER CONSUMPTION (W)	1	1.5
DRIVE CURRENT (mA)	350	500
FORWARD VOLTAGE (V DC)	3	3
MAX TEMPERATURE (°C)	40	40

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.3
IES TM-30 COLOUR GAMUT (Rg)	98.1
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

2 Core Silicone (180°C)
6.4mm OD - 2 off 24/0.2 (0.75mm2)
350mm
N/A
55g
N/A

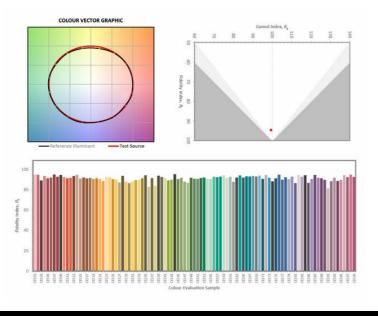





WWW.JOHNCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



