

KEW 25 PLANT SPIKE  
GLK2PN253

LUMINAIRE REF:



PROJECT REF:



OLIVE GREEN RAL 6003

The Kew 25 Plant Spike is a miniature spike mounted exterior spotlight with a smaller spike ideal for use in plant pots. It is ideal for highlighting small features in a plant pot such as trees, shrubs or foliage with a beam of directed light. Mounted on a spike requiring a 130mm burial depth, it can be repositioned in the earth as the planting grows and changes between seasons. The light is shielded within the fitting to precisely direct the light minimising glare. It comes as standard with a half snoot but other snoots are available as accessories.

The colour and size of the fitting ensures it disappears into planting. The Kew is IP66 Rated - see FAQs for more details on IP Values.



NARROW

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



KEW 25 CAP  
SNOOT OLIVE  
GREEN  
ACK2CS251



KEW 25 FULL  
SNOOT OLIVE  
GREEN  
ACK2FS251



KEW 25 HALF  
SNOOT OLIVE  
GREEN  
ACK2HS251



KEW 25 SHORT  
SNOOT OLIVE  
GREEN  
ACK2SS251



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



KEW 25 PLANT SPIKE

GLK2PN253

LUMINAIRE REF:

PROJECT REF:



SPECIFICATION	350mA	500mA
BEAM ANGLE (°)	11°	11°
LED SOURCE LUMENS (LM)	101	137
LUMINAIRE LUMENS (LM)	66	94
LUMINAIRE EFFICACY (LM/W)	66	63
INTENSITY RATING (CD)	975	1349
POWER CONSUMPTION (W)	1	1.5
DRIVE CURRENT (mA)	350	500
FORWARD VOLTAGE (V DC)	3	3
MAX TEMPERATURE (°C)	40	40

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.3
IES TM-30 COLOUR GAMUT (Rg)	98.1
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180°C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	2800mm
CONNECTOR TYPE	IP67 Connector Box Included
WEIGHT	55g
FIRE RATED	N/A

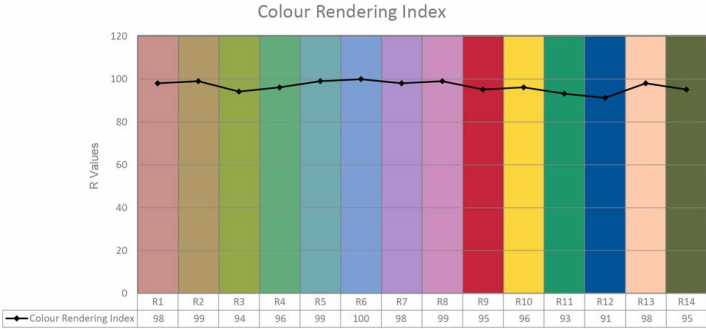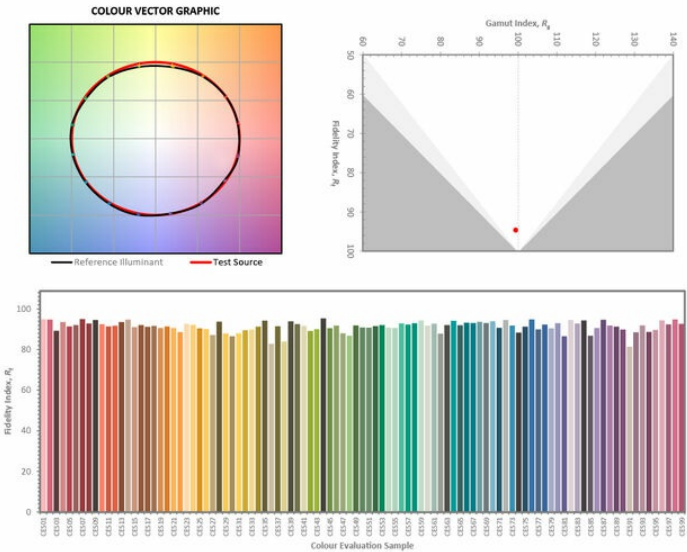

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

