

KEW 25 PLANT SPIKE
MINIATURE SHORT SPIKE-MOUNTED ADJUSTABLE SPOTLIGHT

LUMINAIRE REF:



PROJECT REF:



OLIVE GREEN RAL 6003

The Kew 25 Plant Spike is a miniature spike mounted exterior spotlight with a smaller spike ideal for use in plant pots. It is ideal for highlighting small features in a plant pot such as trees, shrubs or foliage with a beam of directed light. Mounted on a spike requiring a 130mm burial depth, it can be repositioned in the earth as the planting grows and changes between seasons. The light is shielded within the fitting to precisely direct the light minimising glare. It comes as standard with a half snoot but other snoots are available as accessories.

The colour and size of the fitting ensures it disappears into planting. The Kew is IP66 Rated - see FAQs for more details on IP Values.



NARROW

ACCESSORIES



IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG



IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML



KEW 25 CAP
SNOOT OLIVE
GREEN
ACK2CS251



KEW 25 FULL
SNOOT OLIVE
GREEN
ACK2FS251



KEW 25 HALF
SNOOT OLIVE
GREEN
ACK2HS251



KEW 25 SHORT
SNOOT OLIVE
GREEN
ACK2SS251



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



KEW 25 PLANT SPIKE

MINIATURE SHORT SPIKE-MOUNTED ADJUSTABLE SPOTLIGHT

LUMINAIRE REF:

PROJECT REF:



SPECIFICATION	NARROW	MEDIUM	WIDE
BEAM ANGLE (°)	11°	22°	30°
LED SOURCE LUMENS (LM)	139	139	139
LUMINAIRE LUMENS (LM)	94	93	85
INTENSITY RATING (CD)	1349	479	263
POWER CONSUMPTION (W)	1.5	1.5	1.5
LUMINAIRE EFFICACY (LM/W)	62	62	57
DRIVE CURRENT (mA)	N/A	N/A	N/A
FORWARD VOLTAGE (V DC)	3	3	3

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.3
IES TM-30 COLOUR GAMUT (Rg)	98.1
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180°C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	2800mm
CONNECTOR TYPE	IP67 Connector Box Included
WEIGHT	55g
FIRE RATED	N/A

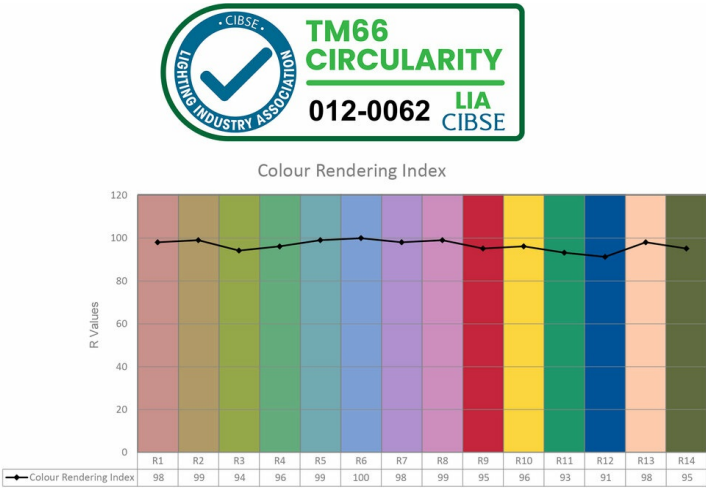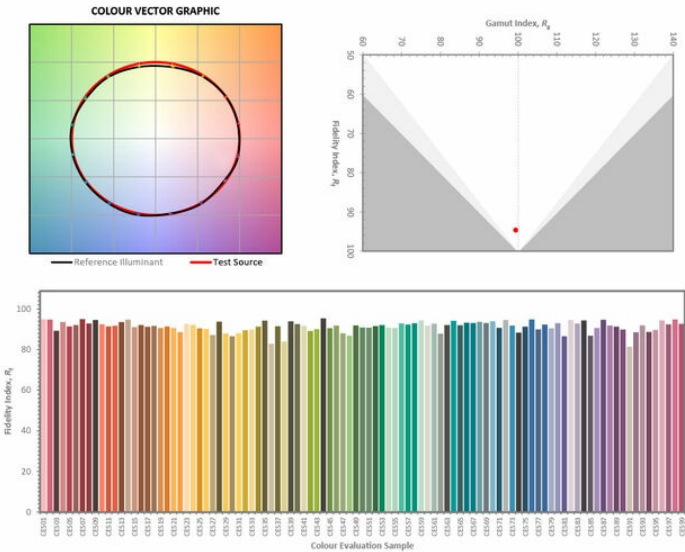

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81