

LUCCA 30 DOWNLIGHT NARROW BLACK 2024 SLL3TN022.


LUMINAIRE REF:

PROJECT REF:



The new Lucca 30 is an energy efficient LED miniature downlight incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It is ideal for creating stunning skimming light on a shelf. It comes with narrow, medium or wide beams to suit your projects with or without a glare cowl. It is IP67 rated so ideal for use both inside and out. Fittings come with 1m of cable as standard. Custom cable lengths are available upon request. If using inside, the warranty increases to 5 years.

BLACK ANODISED





NARROW

ACCESSORIES



IP66 ENCLOSURE FOR DRIVER LARGE ACENIPLRG



FOR DRIVER SMALL ACENIPSML



UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM

BRITISH DESIGN UK CA

 \cap

JOHN CULLEN

700mA

11°

137

92

40

1401

2.3

700

3

LUCCA 30 DOWNLIGHT NARROW BLACK 2024 SLL3TN022.

500mA

11°

105

73

45

1104

1.6

500

4C

BS EN 60598-2-13: 2006+A1: 2012+A2: 2016

350mA

11°

78

55

50

829

1.1

350

40

SPECIFICATION

BEAM ANGLE (°)

LED SOURCE LUMENS (LM)

LUMINAIRE LUMENS (LM)

INTENSITY RATING (CD)

DRIVE CURRENT (mA)

LUMINAIRE EFFICACY (LM/W)

POWER CONSUMPTION (W)

FORWARD VOLTAGE (V DC)

MAX TEMPERATURE (°C)


INGRESS RATING

IMPACT RATING

COMPLIANCE

LUMINAIRE REF:

PROJECT REF:



| | 30° 0° cd / 1000 m |
|--------------------------------|-----------------------|
| COLOUR TEMPERATURE | 2700K |
| CIE CRI AVAILABLE AS | 92 Ra |
| IES TM-30 COLOUR FIDELITY (Rf) | 92.1 |
| IES TM-30 COLOUR GAMUT (Rg) | 99.4 |
| BINNING | 2 SDCM |
| LIFETIME L70/B10 (HOURS) | >50000 |
| AMBIENT TEMPERATURE (Ta) | N/A |

OTHER DATA

| 2 Co | CABLE TYPE |
|------|----------------|
| 6mr | CABLE SIZE |
| 100 | CABLE LENGTH |
| N/A | CONNECTOR TYPE |
| N/A | WEIGHT |
| N/A | FIRE RATED |

| 4 | |
|---|---------------------------------|
| Ξ | 2 Core Silicone (180°C) |
| Ξ | 6mm OD - 2 off 24/0.2 (0.75mm2) |
| Η | 1000mm |
| Ξ | N/A |
| Г | N/A |

| ELECTRICAL | |
|--------------|------------------------------------|
| SOURCE TYPE | LED |
| RODUCT CLASS | Class III (SELV low voltage) |
| NG PROTOCOL | 1-10V dimmable |
| | DALI dimmable |
| | Mains dimmable (phase cut dimming) |
| | Switched |

TM66 2.4 (LIA Assured Verification Score)


BS EN IEC 60598-1:2021 BS EN 62493:2015+A1:2022 BS EN IEC 62031:2020+A11:2021

IP65 + IP67

IK08

COLOUR VECTOR GRAPHIC




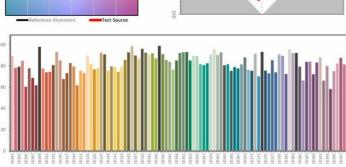

60 70 Fidelit

80 ndex, f

8

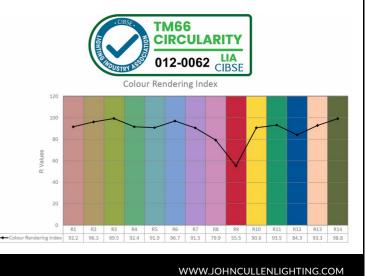



UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



UK CA

 \cap