

KEW 40 SPIKE  
GLK4SN252

LUMINAIRE REF:

PROJECT REF:





OLIVE GREEN

DIRECTIONAL OLIVE GREEN NARROW SPIKE SPOTLIGHT

The Kew 40 is a medium sized spike mounted exterior spotlight. It is a garden light fitting ideal for highlighting landscape features such as trees, pergolas or statues or foliage with a beam of directed light. Mounted on a spike, it can be repositioned in the earth as the planting grows and changes between seasons. The light is shielded within the fitting to precisely direct the light minimising glare. It comes as standard with a half snoot but other snoots are available as accessories. Independently tested by the LIA.

The colour and size of the fitting ensures it disappears into planting. The Kew is IP66 Rated - see FAQs for more details on IP Values.

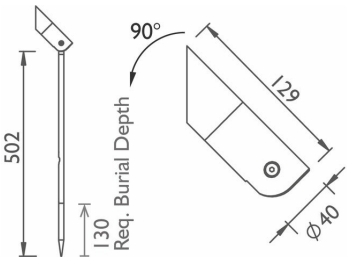

NARROW

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



KEW 40 CAP  
SNOOT OLIVE  
GREEN  
ACK4CS251



KEW 40 FULL  
SNOOT OLIVE  
GREEN  
ACK4FS251



KEW 40 HALF  
SNOOT OLIVE  
GREEN  
ACK4HS251



KEW 40 SHORT  
SNOOT OLIVE  
GREEN  
ACK4SS251




KEW 40 SPIKE

GLK4SN252

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW
BEAM ANGLE (°)	18°
LED SOURCE LUMENS (LM)	840 lm
LUMINAIRE LUMENS (LM)	572 lm
INTENSITY RATING (CD)	4451
POWER CONSUMPTION (W)	8W
LUMINAIRE EFFICACY (LM/W)	71.5 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	12V


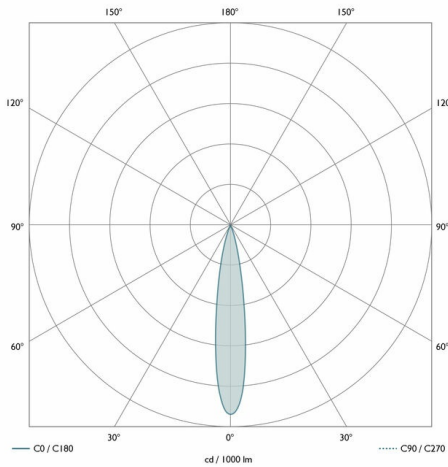


INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>94 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Cable Type	2 Core Silicone (180 °C)
Cable Size	6.4mm OD - 2 off 24/0.2 (0.75mm2)
Cable Length	1800mm
Connector Type	N/A
Weight	285g
Fire rated	N/A

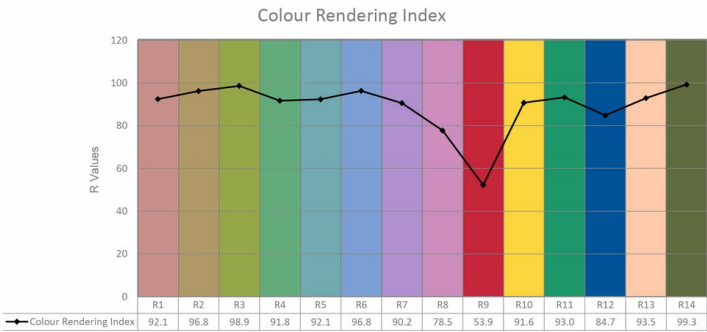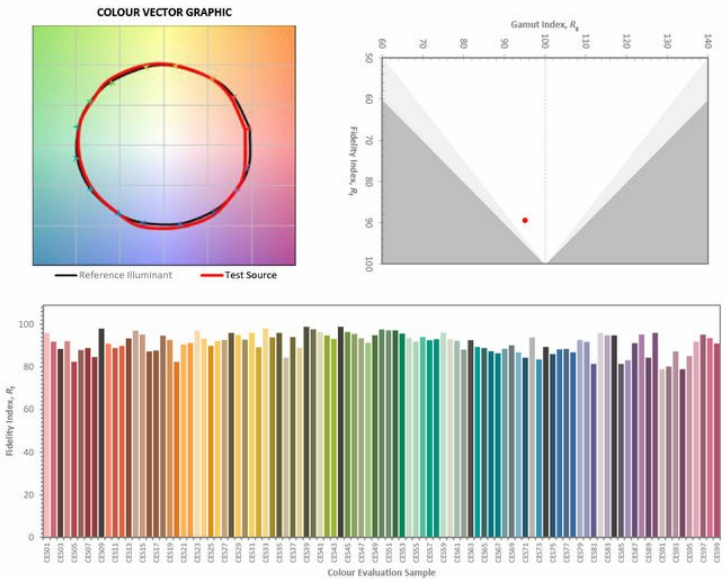

WWW.JOHNCCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

