

POLESPRING PURE 30 WHITE NARROW  
KPS30X27NA9003

LUMINAIRE REF:

PROJECT REF:





WHITE RAL 9003 TEXTURED

WHITE NARROW DIRECTIONAL 2700K MICRO DOWNLIGHT

The Polespring 30 is a low glare miniature directional downlight suitable for both interior and marine applications. An extra deep black baffle and extra slim bezel allows for a low glare and minimal architectural lighting solutions. Available in trim and trimless, fixed and tilt to 30 degrees, making it one of the best architectural downlights.

Commissioning and the changing of LED engines is made easier with the ability to interchangeable engines without the need for hand tools.



NARROW

ACCESSORIES

			
HONEYCOMB INSERT 23MM ACHC23MM1	SPREADER LENS 23MM ACLL23MM1	SANDBLASTED GLASS LENS 23MM ACSG23MM1	SOFTENING LENS 23MM ACSL23MM1



WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




POLESPRING PURE 30 WHITE NARROW

KPS30X27NA9003

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW
BEAM ANGLE (°)	11°
LED SOURCE LUMENS (LM)	172
LUMINAIRE LUMENS (LM)	146
INTENSITY RATING (CD)	2570
POWER CONSUMPTION (W)	2
LUMINAIRE EFFICACY (LM/W)	73
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	2.8V DC


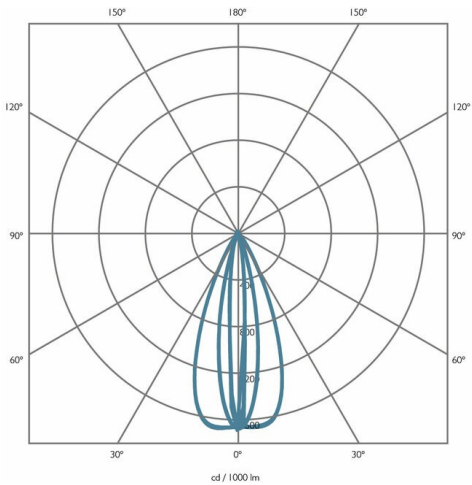


INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1
	IEC/EN 60598-2-2

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>95
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (105°C)
CABLE SIZE	4.1mm OD - 2 off 17/0.15
CABLE LENGTH	300mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

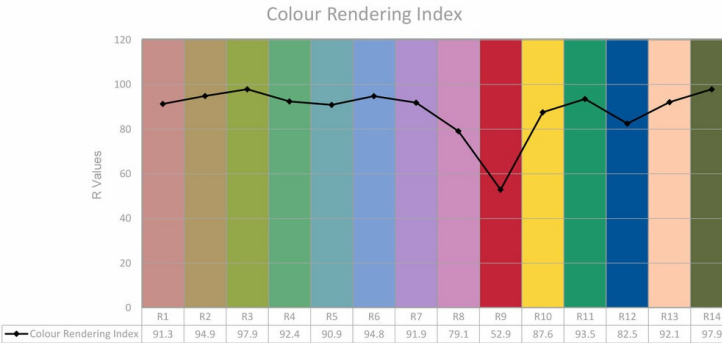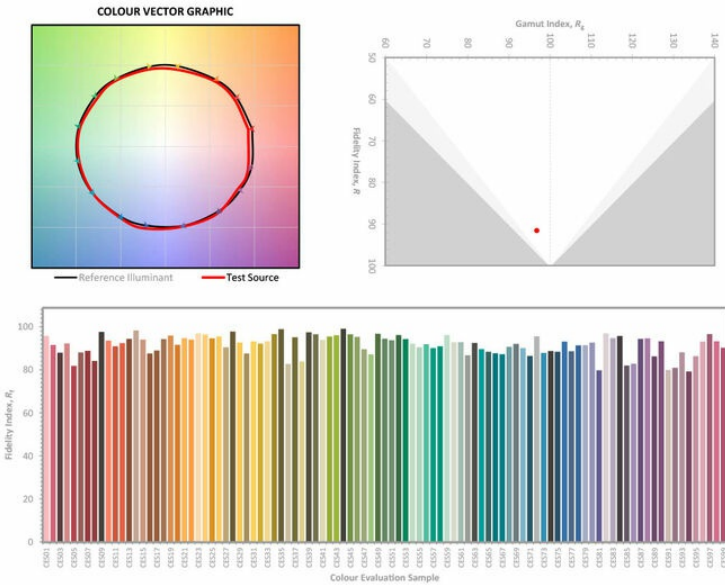

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

